

531,130

10/531130

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number  
**WO 2004/035301 A2**

(51) International Patent Classification<sup>7</sup>: **B29D 30/24**

RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:  
PCT/NL2003/000698

(22) International Filing Date: 15 October 2003 (15.10.2003)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:  
1021668 16 October 2002 (16.10.2002) NL

(71) Applicant (for all designated States except US): **VMI EPE  
HOLLAND B.V.** [NL/NL]; Gelriaweg 16, NL-8161 RK  
Epe (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SLOTS, Tonnie**  
[NL/NL]; Stokvisweg 5, NL-8111 RS Heeten (NL).  
**GROLLEMAN, Henk-Jan** [NL/NL]; Jan Mankestraat  
3a, NL-6961 CC Eerbeek (NL).

(74) Agents: **FERGUSON, Alexander et al.**; Octrooibureau  
Vriesendorp & Gaade, P.O. Box 266, NL-2501 AW The  
Hague (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted  
a patent (Rule 4.17(ii)) for the following designations AE,  
AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH,  
CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES,  
FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH,  
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,  
TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO  
patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG,  
ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU,  
TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE,  
DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT,  
RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

#### Published:

— without international search report and to be republished  
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: **TITLE: TYRE DRUM WITH TURN-UP MECHANISM FOR BUILDING AN UNVULCANIZED TYRE**

(57) Abstract: Tyre drum including a turn-up mechanism, the tyre drum being provided with a central shaft, two ring segments placed around the shaft and spaced apart for supporting the bead cores and the tyre drum on either side outside of the ring segments being provided with a set of axially extending arms, the arms at a first free end oriented towards the ring segment being provided with a first turn-up means, particularly a turn-up roller, and at an opposite second end being hinged to an axially shiftable arm support, near the first end at least a part of the arms being provided with means for supporting the tyre component, the support means in an initial position forming a circumferential support surface for the tyre components, the tyre drum further being provided with means for shifting the arm supports in order to move the second ends of both sets of arms axially towards each other, the arms being tiltable in radial planes from the initial position to a tilting position in order to thus move the first ends axially and radially while pressing the part of the tyre components situated outside of the ring segments against the expanded part of the tyre components situated within the ring segments, the support means comprising one or more support rollers provided with a support surface for the tyre component, which support roller is rotatably arranged on the arm.



WO 2004/035301 A2

## **Tyre drum with turn-up mechanism for building an unvulcanized tyre.**

The invention relates to a tyre drum including a turn-up mechanism for use in building an unvulcanized tyre having tyre components of rubber, having reinforcement cords and two bead cores which either may or may not be provided with a bead filling strip.

5

A known tyre drum has been provided with a central shaft, two ring segments placed around the shaft and spaced apart for supporting the bead cores and means for radially expanding the part of the tyre components that is situated within the ring segments. On either side outside of the ring segments the tyre drum is provided with a set of axially extending arms, each arm at a first free end oriented towards the ring segment being provided with a first turn-up means, particularly a turn-up roller, and at an opposite second end being hinged to an axially shiftable arm support. Near the first end each arm is provided with means for supporting the tyre component.

15

In the initial position the support means form a circumferential series of support surfaces for the tyre components. For the turn-up process the second ends of both sets of arms are axially moved towards each other by means of means for shifting the arm supports. Because simultaneously the part of the tyre components situated within the ring segments is expanded the arms will be subjected to a tilting movement in radial planes to a tilting position, as a result of which the first ends move axially and radially while pressing the part of the tyre components situated outside of the ring segments against the expanded part of the tyre components situated within the ring segments.

25

Such tyre drums provided with a turn-up mechanism are generally known.

They may be designed as tyre building drum on which the tyre components, in particular liner and carcass layers are supplied and of which a cylindrical sleeve is being made, and also bead cores are supplied, after which the cylindrical sleeve on the tyre building drum is expanded into a shaped torus shape, in which the sides of the sleeve are turned up about the bead cores by means of the turn-up mechanism. They may also be designed as a shaping drum, to which an already formed cylindrical carcass sleeve has been supplied.

Such a tyre building drum including turn-up mechanism is among others known from International patent application WO 98/52740. During the turn-up process in which the arms tilt, the parts of the tyre components that are situated on the support means shift over the support means towards the turn-up means (turn-up roller) in order to be discharged from there. The sets of hinging arms on either side outside of the ring segments are synchronously movable from the initial position to the tilting position by a mechanical coupling.

When tilting the arms the diameter defined by the series of support means on the arms becomes larger, as a result of which the part of the tyre components supported on the arms is subjected to tensile stress and comes to lie more tightly around the arms. As a result the tyre components in the tilting position of the arms will be very tight -and therefore straight- between the arms. The resistance against shifting along the arms will also become larger, as a result of which the turn-up process is hindered. This is particularly the case in processes in which high and/or soft side walls are being turned-up.

In International patent application WO 01/68356 an improvement is suggested, in which the support means may be formed by a support plate that can be shifted along the arm which plate in a final position can extend over the turn-up roller, or by a support belt circulating freely about the turn-

up roller and about a roller backwardly spaced on the arm. These solutions can in principle be used, but due to the complexity malfunctions may occur.

5 It is an object of the present invention to provide a tyre drum including a simple turn-up mechanism having arms by means of which tyres can be manufactured accurately.

From one aspect the invention to that end provides a tyre drum including a turn-up mechanism for use in building an unvulcanized tyre having tyre components of rubber, including reinforcement cords and two bead cores which  
10 either may or may not be provided with a bead filling strip, which tyre drum is provided with a central shaft, two ring segments placed around the shaft and spaced apart for supporting the bead cores and means for radially expanding the part of the tyre components that is situated within the ring  
15 segments and the tyre drum on either side outside of the ring segments being provided with a set of axially extending arms, the arms at a first free end oriented towards the ring segment being provided with a first turn-up means, particularly a turn-up roller, and at an opposite second end being hinged to an axially shiftable arm support, near the first end at least a part of  
20 the arms being provided with means for supporting the tyre component, the support means in an initial position forming a circumferential support surface for the tyre components, the tyre drum further being provided with means for shifting the arm supports in order to move the second ends of both sets of arms axially towards each other, the arms being tiltable in radial planes  
25 from the initial position to a tilting position in order to thus move the first ends axially and radially while pressing the part of the tyre components situated outside of the ring segments against the expanded part of the tyre components situated within the ring segments, the support means comprising at least one support roller provided with a support surface for the  
30 tyre component, which support roller is rotatably arranged on the arm.

The support rollers form a simple and cheap addition to the arms and provide

a reliably operating rolling support for the tyre components during the turn-up process, particularly also when tyres having high or limp side walls have to be made. It is advantageous that no support surface moves between the turn-up roller and the tyre component that might get dirty and as a result would increase the friction (adhesion): the turn-up roller itself is in continuous contact with the tyre component. The simple support roller hardly constitutes an increase of the weight of the arm, which is advantageous when using long arms.

10 Preferably the arm is provided with at least two support rollers arranged adjacent to each other on either side of the arm, as a result of which the attachment of the support rollers is simple. The arm may be made from a plate here, the support rollers being situated on either side of the plate material.

15 Preferably the arm is provided with at least two support rollers arranged spaced apart in arm direction, as a result of which the tyre components are offered support on several locations situated spaced apart along the arm.

20 The running off of the tyre component from the arm during the turn-up process is enhanced when the support roller is arranged on the arm in a free-running manner.

25 Preferably the support surface of the support roller is in one plane with the surface of the turn-up roller, which in the initial position is tangential to the centre line of the central shaft, as a result of which an at least almost straight-circle-cylindrical support surface is offered.

30 In a further development each set of arms comprises primary arms provided with one or more support rollers and secondary arms that have no support rollers and that are situated in between the primary arms, the support rollers of the primary arms defining a circumferential series of support surfaces and

the turn-up rollers of the secondary arms being radially recessed with respect to the turn-up rollers of the primary arms. The use of two types of arms in each set has already been suggested in the aforementioned WO 98/52740, but in that document the turn-up rollers of the secondary arms are situated at the same circumferential circle as the turn-up rollers of the primary arms. In the new proposal the advantage of two types of arms described in WO 98/52740 is joined with the advantage of support surfaces, but the secondary arms are kept simple and relatively lightweight without loss of effectiveness.

Preferably the turn-up rollers of the secondary arms with their surface in radial direction extend at the most to the connecting line or chord of the support surfaces of the two support rollers situated adjacently at either side, and preferably they remain below it.

Preferably the turn-up roller of the secondary arms in the initial position is situated with respect to the ring segments in axial direction behind the turn-up roller of the adjacent primary arms. Thus the turn-up rollers of the primary arms can be situated closely next to each other in the initial position.

Preferably the turn-up roller of the secondary arms considered in axial direction is situated between the turn-up roller of the primary arms and the nearest support roller on those arms, as a result of which also the support rollers of the adjacently situated primary arms can be situated close to each other.

From a further aspect the invention provides a tyre drum of the indicated type, secondary arms provided with a turn-up roller being arranged between the arms provided with one or more support rollers, of which secondary arms the turn-up roller in the initial position is recessed in comparison with the turn-up roller of the adjacent arms provided with one or more support rollers, of which arms the support rollers define a circumferential series of support

surfaces.

From a further aspect the invention provides a tyre drum including a turn-up mechanism for use in building an unvulcanized tyre having tyre components of rubber, including reinforcement cords and two bead cores which either may or may not be provided with a bead filling strip, which tyre drum is provided with a central shaft, two ring segments placed around the shaft and spaced apart for supporting the bead cores and means for radially expanding the part of the tyre components that is situated within the ring segments and the tyre drum on either side outside of the ring segments being provided with a set of axially extending arms, the arms at a first free end oriented towards the ring segment being provided with a first turn-up means, particularly a turn-up roller, and at an opposite second end being hinged to an axially shiftable arm support, the tyre drum furthermore being provided with means for shifting the arm supports in order to move the second ends of both sets of arms axially towards each other, the arms being tiltable in radial planes from the initial position to a tilting position in order to thus move the first ends axially and radially while pressing the part of the tyre components situated outside of the ring segments against the expanded part of the tyre components situated within the ring segments, each set of arms comprising primary arms provided with a turn-up roller as well as secondary arms situated in between them and also provided with a turn-up roller, the turn-up rollers of the primary arms in the initial position defining a circumferential series of support surfaces for tyre components and the turn-up rollers of the secondary arms being radially recessed with respect to the turn-up rollers of the primary arms.

Preferably the turn-up roller of the secondary arms in the initial position is situated with respect to the ring segments in axial direction behind the turn-up roller of the adjacent primary arms, so that the turn-up rollers of the primary arms can be situated closely next to each other in the initial position.

A possible embodiment of the tyre (building) drum including turn-up mechanism having arms according to the invention is described below by way of example on the basis of the drawing, in which:

- 5     Figures 1A and 1B show a top view and a side view, respectively, of an arm for a tyre drum according to the invention;

Figures 2A to 2D schematically show a longitudinal section of a tyre building drum including turn-up mechanism according to the invention for building an  
10     unvulcanized tyre, in various processing steps; and

Figures 3A and 3B schematically show a side view of an assembly of two different turn-up arms and a detail of the first ends of an assembled set of turn-up arms.

15

In the figures 1A and 1B the build-up of the turn-up arms 11 is illustrated. The arms 11 are flat and elongated and at their free end are provided with a turn-up roller 13, which by means of little shaft or pin 17 is bearing mounted in a free-running manner in a fork 15 that is permanent to the arm 11. At a  
20     small distance from the fork 15 a pair of support rollers 21a, b has been arranged on the arm 11 in a free-running manner by means of a pin 25. At a slightly smaller distance therefrom a second pair of support rollers 23a,b has been arranged on arm 11 in a free-running manner by means of a pin 27. The pins 17, 25 and 27 are parallel to each other. The support rollers 21a,b and  
25     23a,b have a diameter that is smaller than the diameter of the turn-up roller 13. The tangent planes of the surfaces 29, 31 and 33 of the turn-up roller 13, support rollers 21a,b and support rollers 23a,b , respectively, are in one plane O with each other, which plane forms a virtual support surface for tyre components. The support surfaces O of consecutive arms by approximation  
30     form circle-cylindrical circumferential support surface about the tyre drum. The surfaces 29 of the turn-up rollers 13 and the support surfaces 31, 33 of adjacently situated arms 11 form a circumferential series of support surfaces,



that connect to each other as closely as possible.

As can be seen in figure 1B, the arm 11 is L-shaped, in which the other end S is suitable to be mounted in a hinging manner.

5

In figure 1A it can be seen that the support rollers 21a,b and 23a,b extend sideward over equal length over arm 11, but remain within the outside of the fork 15.

10 At a location between the last support rollers 23 and the second end, the arms 11 have furthermore been provided with a recess 35 for a usual tensile means, such as an elastic ring, extending circumferentially about the drum.

15 Figures 2A to 2D schematically show a longitudinal section of a tyre building drum 1 that is symmetrical about plane Y and includes a turn-up mechanism according to the invention for building an unvulcanized (radial) tyre, in different processing steps. Such an unvulcanized tyre comprises tyre components 2 made of rubber, optionally provided with reinforcement cords, (in the stage shown in figure 2A the used tyre components are a so-called  
20 liner having two sides 2a and a carcass layer) and two bead cores 3 with -in this case- a high bead filling strip on it. The number and the type of tyre components depend on the tyre to be manufactured in the end, and the possible compositions and build-up are sufficiently known to the expert so that they will not be further discussed here.

25

The tyre building drum 1 is provided with a central shaft 10 having centre line X. About the shaft 10 and at a distance from each other two annular bead clamping segments 5, 6 have been placed, each for supporting corresponding bead cores 3, 4 and provided with mobile inner supports,  
30 which prevent that during the forming (figure 2D) of the carcass is pressed off from the annular segments 5, 6. Furthermore there are means (not shown in the figures) for -for instance by means of air pressure- radially expanding

the part of the tyre components that is situated within the segments 6.

About the shaft 10 -at both ends- two annular cylinders 7, 8 are also arranged, in which cylinders pistons 39, 40 extend. At the location of hinge points S turn-up arms 11, 12 according to figures 1A, 1B are connected to the cylinders 39, 40, such that in the initial position shown in figure 2A, the plane O of each arm 11, 12 runs parallel to the centre line X. The arms 12 are identical to the arms 11, having turn-up rollers 14, support rollers 22, 24 and recess 36.

In the situation of figure 2A the tyre components 2 in the form of a liner (inner liner) having side walls 2' have been arranged, and after that one or more cord plies and optional reinforcement strips. By means of a ply-splice stitcher roller which is moved in axial direction over the circumference, the layers are spliced together, so that a cylindrical tyre sleeve is created.

Subsequently the bead clamping segments 5, 6 are radially expanded, so that they extend radially above the support surface O. They clamp the tyre material about the bead core 3, 4 in order to ensure an airtight clamping. Due to the upward pressing, the tyre material 2' is already loosened a little at that location from the support surfaces O. This is shown in figure 2B. In a supple manner, without considerable resistance, the tyre components 2' slide over the surfaces of the support rollers 21-24.

In the next stage, shown in figure 2C, the distance between the bead clamping segments 5, 6 is reduced so that the distance between the beads 3, 4 also becomes smaller, and the internal bead supports are raised. Due to air supplied under pressure from within, the cylindrical carcass sleeve starts to expand into a torus-like shape.

Immediately after that the turn-up mechanism is put into operation, in which the arms 11, 12 among others by operating the piston/cylinders 7,8 39,40

are moved axially towards each other (considered on either side of the plane of symmetry). Counter to the spring force of the draw springs running circumferentially through the recesses 35, 36, they also move with the turn-up rollers 13, 14 radially to the outside. As a result the tyre components 2a  
5 are turned by the turn-up rollers 13, 14 about the bead 3, 4 and against the side wall of the torus-shaped carcass. In the ultimate position of the arms they are in the situation shown in figure 2D. During the upward motion of the rollers 13, 14 the sideward tyre components are able to roll over them without problems until in abutment with the side walls of the tyre to be  
10 made.

Also when the arms are brought into the tilted position, the portion in question of the tyre components slides off from over the support rollers 21-24, or rather rolls off from over them.

15

In figure 3A it is schematically shown how an arrangement in the sense of the tyre drum according to International patent application WO 98/52740 could be designed. Here the first ends of the -primary- arms 11 extend to closer to the ring segments. Between each pair of primary arms 11 a  
20 secondary arm 51 has been placed, of which the end is also hinged to an axially movable slide. For further information about this said patent application is referred to. The arms 51 have been provided with fork-shaped accommodation spaces 55, in which by means of shaft 57 a free-running turn-up roller 53 has been attached. The turn-up roller 53 is situated axially  
25 between the turn-up rollers 13 and the support rollers 21a and 21b of adjacent primary arms 11. As a result, in tangential direction the turn-up rollers 53 can extend slightly in intermediate spaces between those rollers. The surface 69 of the turn-up rollers 51 lies radially below the aforementioned plane O of adjacent primary arms 11 and preferably also below the  
30 circumferentially extending connecting line of consecutive planes O, so that the tyre components are fully supported on the support rollers and turn-up rollers of the primary arms. Also the forks 55 are radially below the forks 15.

At a location between the last support rollers 23 and ahead of the recess 35 of the primary arms 11, the arms 51 are also provided with a recess 75 for a usual, tensile means, such as an elastic ring, extending circumferentially about the drum.

In figure 3B all this is shown in perspective view. In the lower portion a number of primary and secondary arms 11, 51 is shown in the initial position. The primary arms 11 are alternated with secondary arms 51, in which the turn-up rollers 53 are axially and radially recessed with respect to the turn-up rollers 13 and radially recessed with respect to the support rollers 21, 23.

In figure 3B a primary arm 11 and a secondary arm 51 for reasons of illustration have been moved out of their lying initial position, in which it is remarked that the position shown is not equal to the turn-up position, because then the arms will have been moved axially as well.

## Claims

1. Tyre drum including a turn-up mechanism for use in building an unvulcanized tyre having tyre components of rubber, including reinforcement cords and two bead cores which either may or may not be provided with a bead filling strip, which tyre drum is provided with a central shaft, two ring segments placed around the shaft and spaced apart for supporting the bead cores and means for radially expanding the part of the tyre components that is situated within the ring segments and the tyre drum on either side outside of the ring segments being provided with a set of axially extending arms, the arms at a first free end oriented towards the ring segment being provided with a first turn-up means, particularly a turn-up roller, and at an opposite second end being hinged to an axially shiftable arm support, near the first end at least a part of the arms being provided with means for supporting the tyre component, the support means in an initial position forming a circumferential support surface for the tyre components, the tyre drum further being provided with means for shifting the arm supports in order to move the second ends of both sets of arms axially towards each other, the arms being tiltable in radial planes from the initial position to a tilting position in order to thus move the first ends axially and radially while pressing the part of the tyre components situated outside of the ring segments against the expanded part of the tyre components situated within the ring segments, the support means comprising at least one support roller provided with a support surface for the tyre component, which support roller is rotatably arranged on the arm.
2. Tyre drum according to claim 1, the arm being provided with at least two support rollers arranged adjacent to each other on either side of the arm.

3. Tyre drum according to claim 1 or 2, the arm being provided with at least two support rollers arranged spaced apart in arm direction.
4. Tyre drum according to claim 1, 2 or 3, the support roller being arranged  
5 on the arm in a free-running manner.
5. Tyre drum according to any one of the claims 1-4, the support surface of the support roller being in one plane with the surface of the turn-up roller, which in the initial position is tangential to the centre line of the central  
10 shaft.
6. Tyre drum according to any one of the preceding claims, each set of arms comprising primary arms provided with one or more support rollers and secondary arms that have no support rollers and that are situated in between  
15 the primary arms, the support rollers of the primary arms defining a circumferential series of support surfaces and the turn-up rollers of the secondary arms being radially recessed with respect to the turn-up rollers of the primary arms.
- 20 7. Tyre drum according to claim 6, the turn-up rollers of the secondary arms with their surface in radial direction extending at the most to the connecting line or chord of the support surfaces of the two support rollers situated adjacently at either side.
- 25 8. Tyre drum according to claim 7, the turn-up rollers of the secondary arms with their surface in radial direction remaining below the connecting line or chord of the support surfaces of the two support rollers situated adjacently at either side.
- 30 9. Tyre drum according to any one of the preceding claims, the turn-up roller of the secondary arms in the initial position being situated with respect to the ring segments in axial direction behind the turn-up roller of the adjacent

primary arms.

10. Tyre drum according to claim 9, the turn-up roller of the secondary arms considered in axial direction being situated between the turn-up roller of the  
5 primary arms and the nearest support roller on those arms.

11. Tyre drum according to any one of the claims 1-5, secondary arms provided with a turn-up roller being arranged between the arms provided with one or more support rollers, of which secondary arms the turn-up roller in the  
10 initial position is recessed in comparison with the turn-up roller of the adjacent arms provided with one or more support rollers, of which arms the support rollers define a circumferential series of support surfaces.

12. Tyre drum including a turn-up mechanism for use in building an unvul-  
15 canized tyre having tyre components of rubber, including reinforcement cords and two bead cores which either may or may not be provided with a bead filling strip, which tyre drum is provided with a central shaft, two ring segments placed around the shaft and spaced apart for supporting the bead cores and means for radially expanding the part of the tyre components that  
20 is situated within the ring segments and the tyre drum on either side outside of the ring segments being provided with a set of axially extending arms, the arms at a first free end oriented towards the ring segment being provided with a first turn-up means, particularly a turn-up roller, and at an opposite second end being hinged to an axially shiftable arm support, the tyre drum  
25 furthermore being provided with means for shifting the arm supports in order to move the second ends of both sets of arms axially towards each other, the arms being tiltable in radial planes from the initial position to a tilting position in order to thus move the first ends axially and radially while pressing the part of the tyre components situated outside of the ring  
30 segments against the expanded part of the tyre components situated within the ring segments, each set of arms comprising primary arms provided with a turn-up roller as well as secondary arms situated in between them and also

provided with a turn-up roller, the turn-up rollers of the primary arms in the initial position defining a circumferential series of support surfaces for tyre components and the turn-up rollers of the secondary arms being radially recessed with respect to the turn-up rollers of the primary arms.

5

13. Tyre drum according claim 13, the turn-up roller of the secondary arms in the initial position being situated with respect to the ring segments in axial direction behind the turn-up roller of the adjacent primary arms.

10 14. Tyre drum according to any one of the preceding claims, equipped as a tyre building drum.

15. Tyre drum provided with one or more of the characterizing measures described in the attached description and/or shown in the attached drawing.



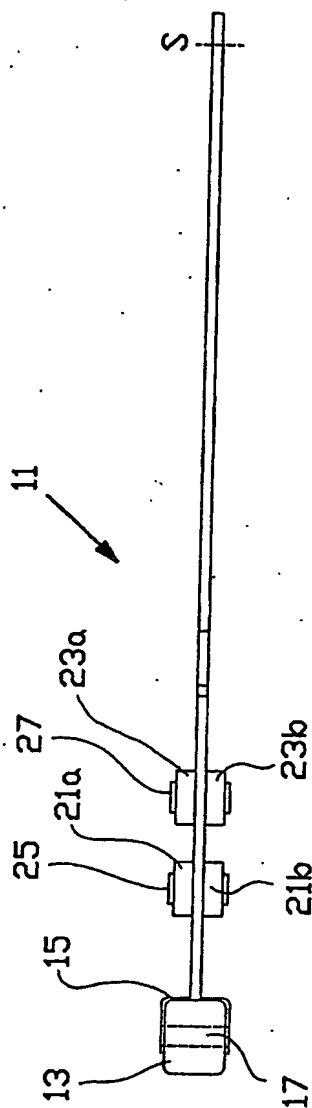


FIG. 1A

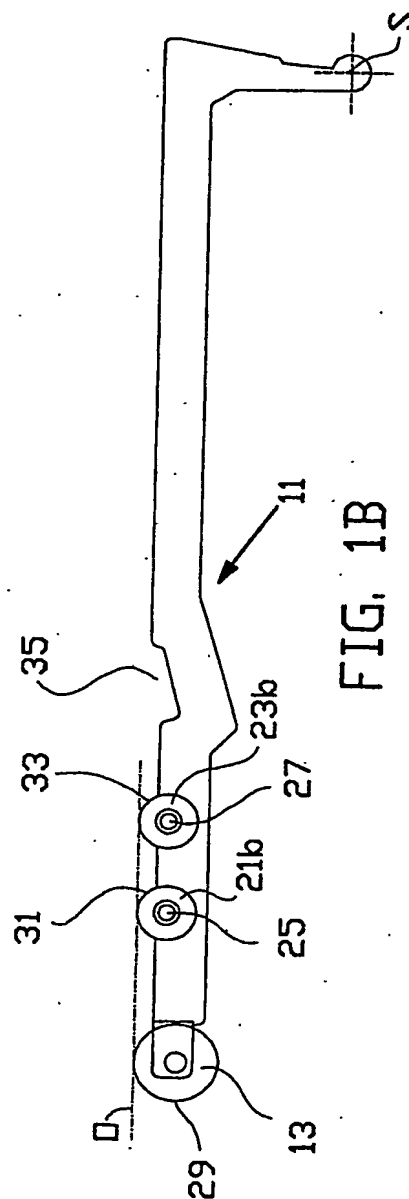


FIG. 1B

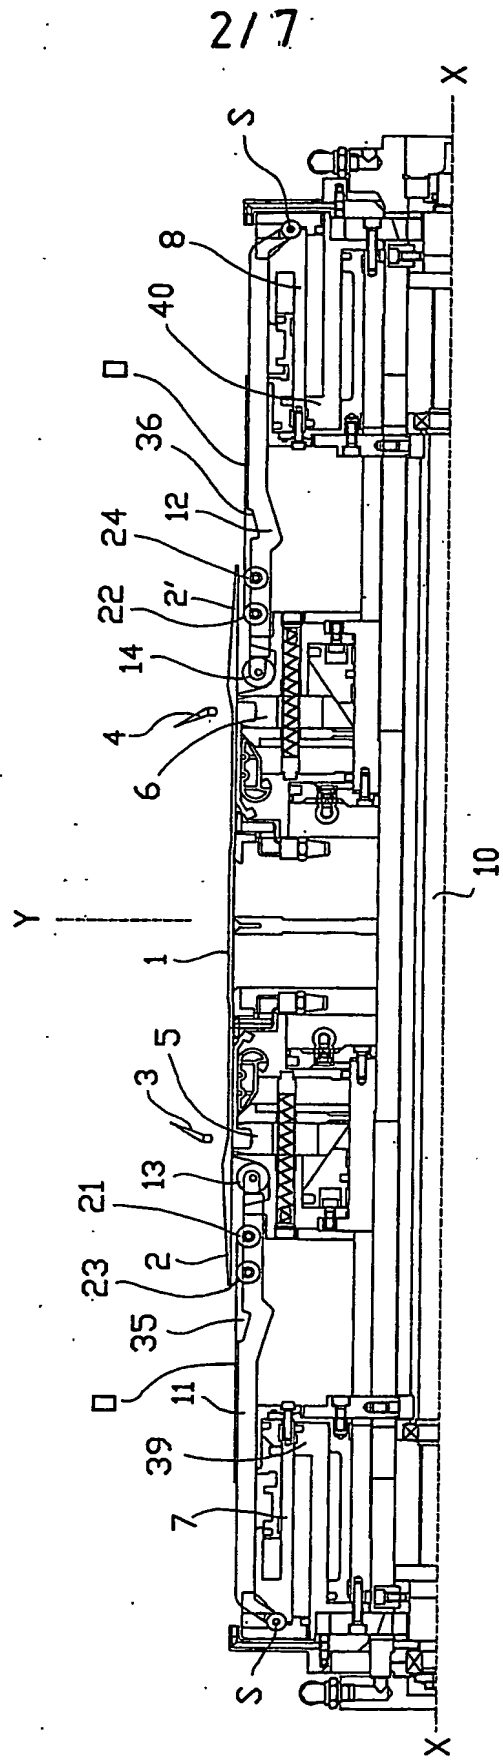


FIG. 2A

3/7

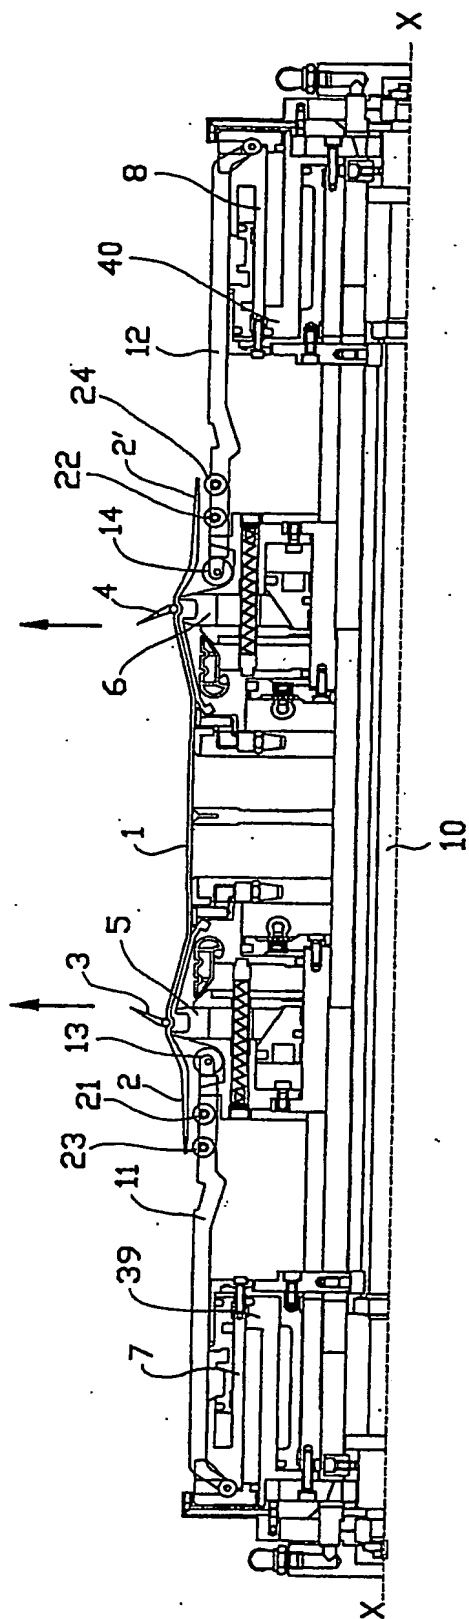


FIG. 2B

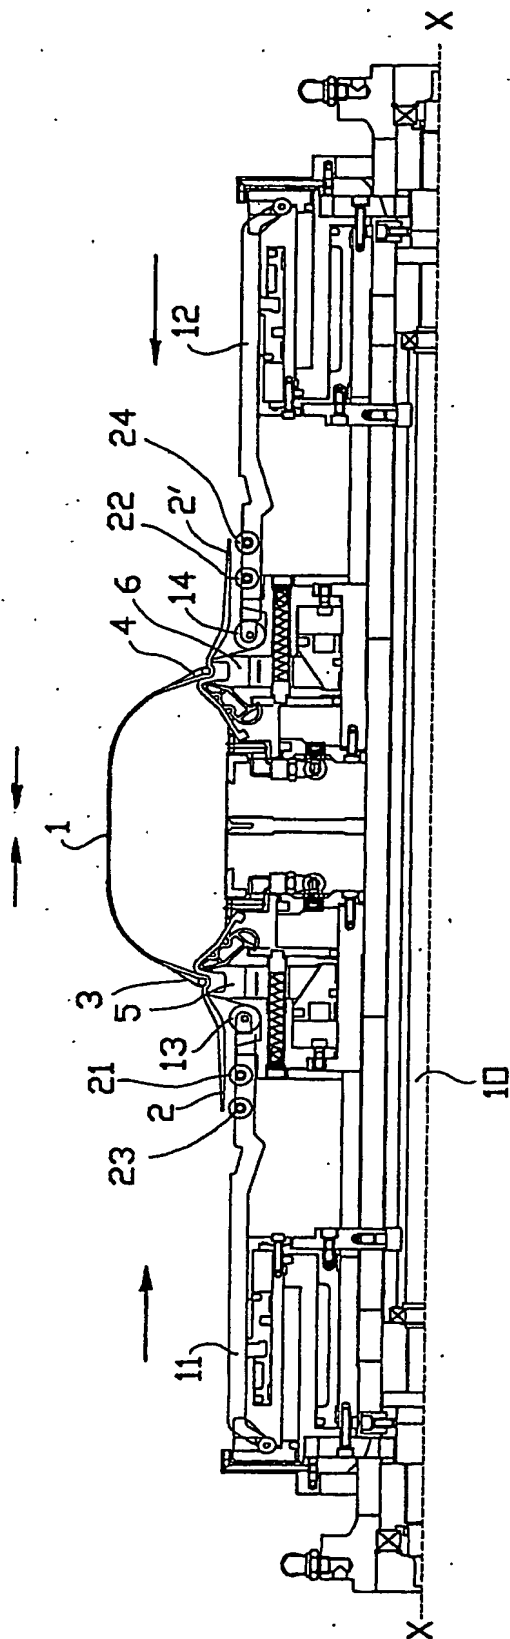


FIG. 2C

5/7

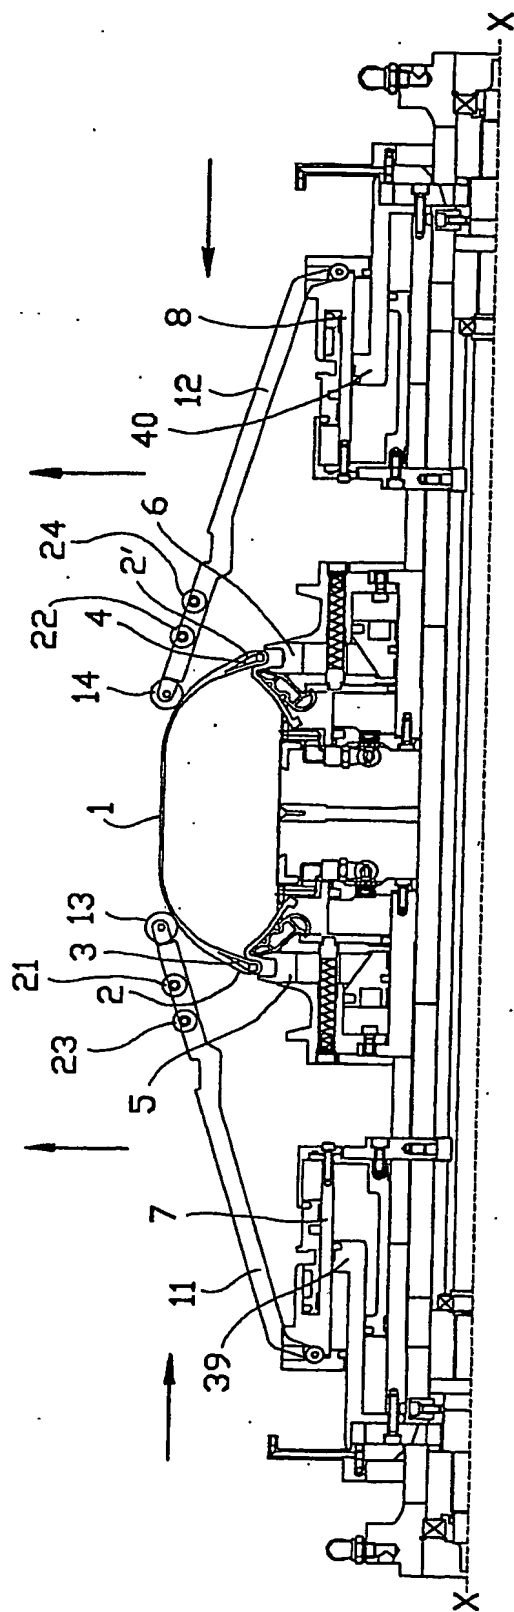


FIG. 2D

6/7


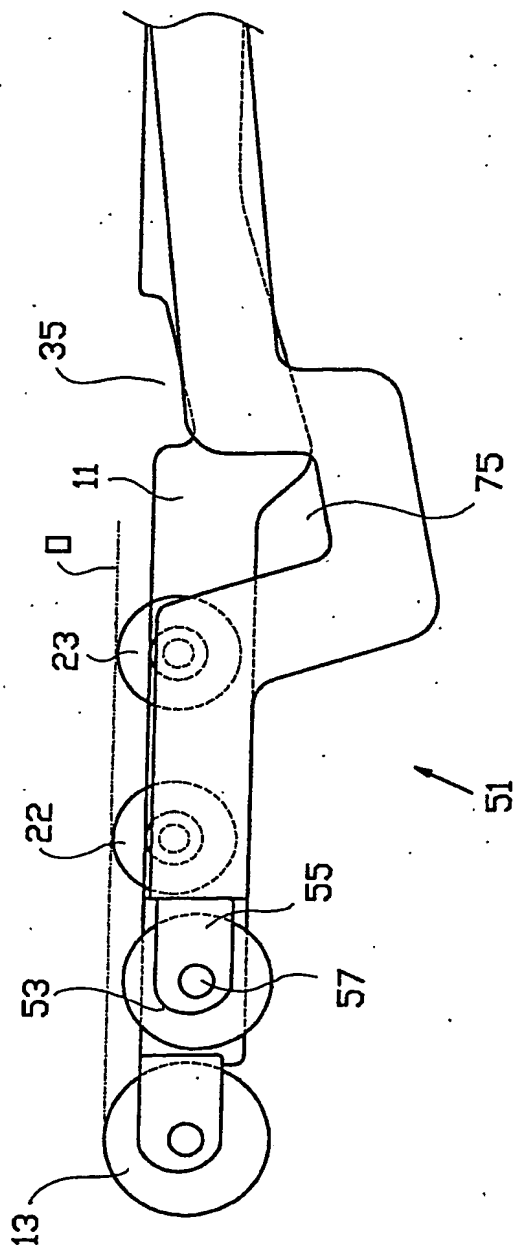


FIG. 3A

7/7

FIG. 3B

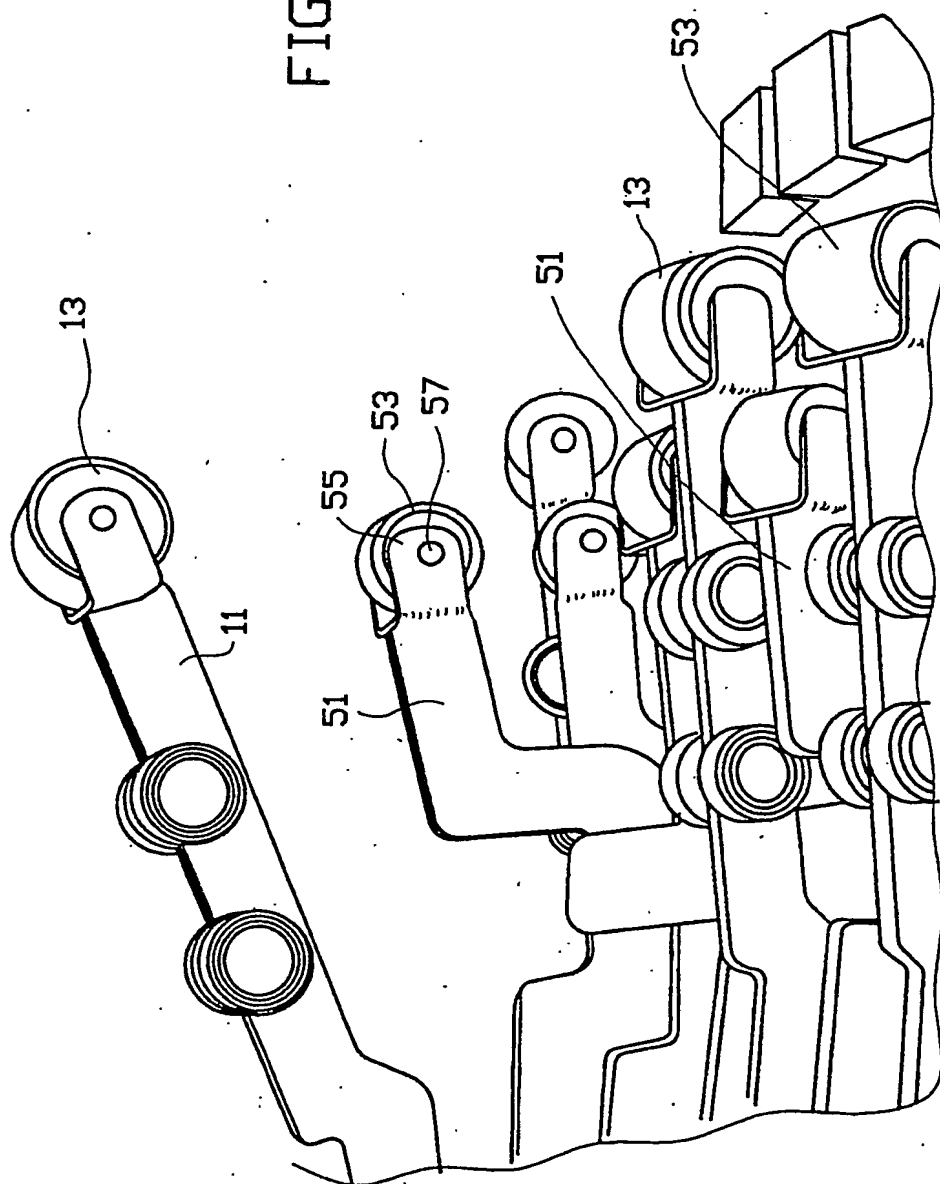

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number  
**WO 2004/035301 A3**


- (51) International Patent Classification<sup>7</sup>: **B29D 30/24**, 30/32
- (21) International Application Number:  
PCT/NL2003/000698
- (22) International Filing Date: 15 October 2003 (15.10.2003)
- (25) Filing Language: Dutch
- (26) Publication Language: English
- (30) Priority Data:  
1021668 16 October 2002 (16.10.2002) NL
- (71) Applicant (for all designated States except US): **VMI EPE HOLLAND B.V.** [NL/NL]; Gelriaweg 16, NL-8161 RK Epe (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SLOTS, Tonnie** [NL/NL]; Stokvisweg 5, NL-8111 RS Heeten (NL). **GROLLEMAN, Henk-Jan** [NL/NL]; Jan Mankestraat 3a, NL-6961 CC Eerbeek (NL).
- (74) Agents: **FERGUSON, Alexander** et al.; Octrooibureau Vriesendorp & Gaade, P.O. Box 266, NL-2501 AW The Hague (NL).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,

[Continued on next page]

(54) Title: TYRE BUILDING DRUM WITH TURN-UP MECHANISM

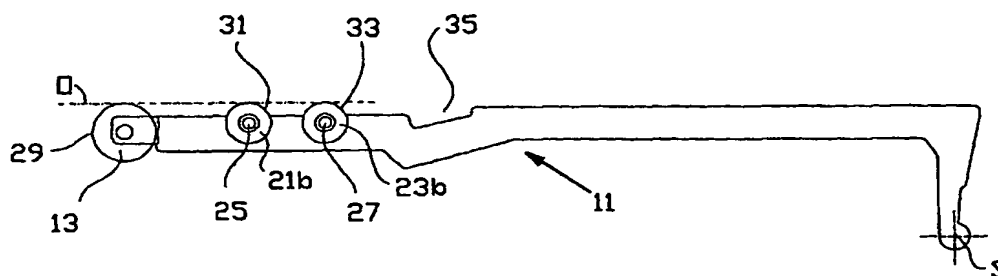

(57) Abstract: Tyre drum (1) including a turn-up mechanism, the tyre drum being provided with a central shaft, two ring segments (5, 6) placed around the shaft and spaced apart for supporting the bead cores (3, 4) and the tyre drum on either side outside of the ring segments being provided with a set of axially extending arms (11), the arms at a first free end oriented towards the ring segment being provided with a first turn-up means, particularly a turn-up roller (13), and at an opposite second end being hinged to an axially shiftable arm support (S), near the first end at least a part of the arms being provided with means (21, 23) for supporting the tyre component, the support means in an initial position forming a circumferential support surface for the tyre components, the tyre drum further being provided with means for shifting the arm supports in order to move the second ends of both sets of arms axially towards each other, the arms being tiltable in radial planes from the initial position to a tilting position in order to thus move the first ends axially and radially while pressing the part of the tyre components situated outside of the ring segments against the expanded part of the tyre components situated within the ring segments, the support means comprising one or more support rollers (21, 23) provided with a support surface for the tyre component, which support roller (21, 23) is rotatably arranged on the arm (11).





TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:  
29 July 2004

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

# INTERNATIONAL SEARCH REPORT

Application No  
PCT/NL 03/00698

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B29D30/24 B29D30/32

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 B29D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 2002/104620 A1 (SALA ADAMO) 8 August 2002 (2002-08-08)  page 2, paragraph 18; figures 1-3,5 page 2, paragraph 20	12-15  1
X A	WO 98/52740 A (BIERENS FRANCISCUS CORNELIS ;GUTKNECHT HEINZ (NL); VMI EPE HOLLAND) 26 November 1998 (1998-11-26) cited in the application	12-15  1
A	WO 01/68356 A (VRIES WUBBO PIETER DE ;GRAAF MARTIN DE (NL); GUTKNECHT HEINZ (NL);) 20 September 2001 (2001-09-20) cited in the application page 12	1,12

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

6 May 2004

Date of mailing of the international search report

18/05/2004

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Fregosi, A

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Application No

PCT/NL 03/00698

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2002104620	A1	08-08-2002	AT 251031 T	15-10-2003
			AU 6265700 A	19-02-2001
			BR 0012849 A	30-04-2002
			CN 1120774 B	10-09-2003
			DE 60005681 D1	06-11-2003
			EG 22375 A	31-12-2002
			WO 0108874 A1	08-02-2001
			EP 1200247 A1	02-05-2002
			TR 200200245 T2	21-06-2002
WO 9852740	A	26-11-1998	AU 3466497 A	11-12-1998
			CN 1254307 A ,B	24-05-2000
			DE 69716774 D1	05-12-2002
			EP 1001876 A1	24-05-2000
			JP 2001525748 T	11-12-2001
			WO 9852740 A1	26-11-1998
			RU 2189318 C2	20-09-2002
			SK 155299 A3	16-05-2000
			US 6318434 B1	20-11-2001
			US 2002124968 A1	12-09-2002
WO 0168356	A	20-09-2001	AU 4484801 A	24-09-2001
			CN 1418149 T	14-05-2003
			EP 1272338 A1	08-01-2003
			JP 2003526546 T	09-09-2003
			WO 0168356 A1	20-09-2001
			SK 13382002 A3	04-03-2003
			US 2003034132 A1	20-02-2003